

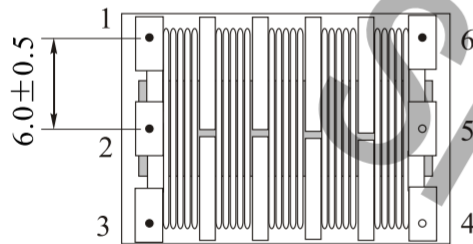
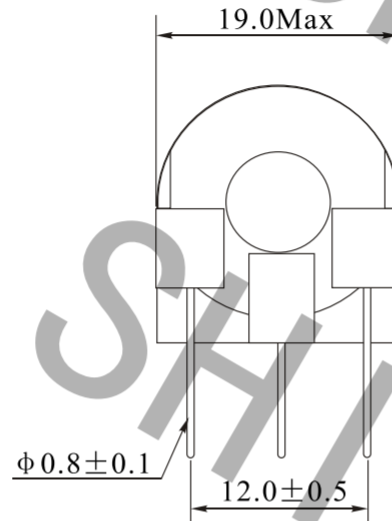


Rev.	Description	Date
A0	New release	2020.08.26

1. PHYSICAL CHARACTERISTICS (mm)

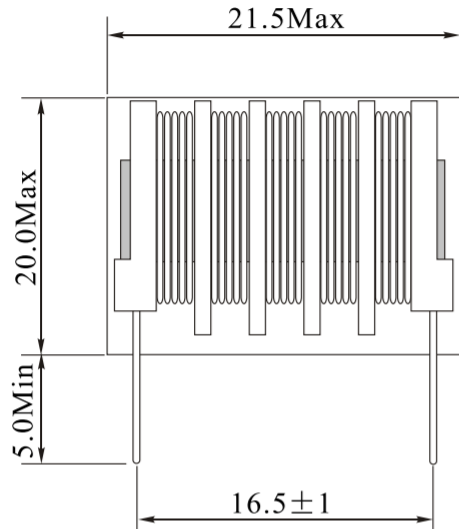

2. ELECTRICAL SCHEMATIC

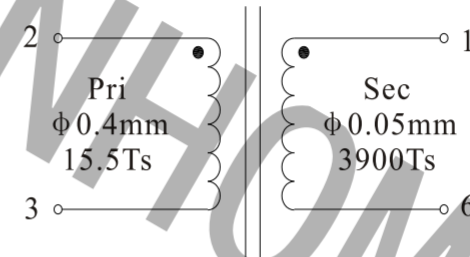

3. ELECTRICAL SPECIFICATIONS

Inductance: Pin2-3: $8\mu\text{H} \pm 20\%$ @ 1KHz, 1V

Pin1-6: $375\text{mH} \pm 20\%$ @ 1KHz, 1V

DCR: Pin2-3: $120\text{m}\Omega$ Max

Pin1-6: $1.5\text{K}\Omega$ Max

Turns ratio: Sec: Pri = 251.6:1

Hi-Pot: 3KVac, 5mA, 1min Pri to Sec

NOTES:

Temp 20°C 48%RH
RoHS Compliant

NEME:	Pulse transformer		
CUSTOMER P/N:		DATE:	2020-08-26
SHINHOM P/N:	HT0615-251	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	






SHINHOM

SHAANXISHINHOM ENTERPRISE CO LTD


The Document property belong to SHINHOM & is not allowed to be duplicated without authorization

Rev.	Description	Date
A0	New release	2022.03.28

1. PHYSICAL CHARACTERISTICS (mm)

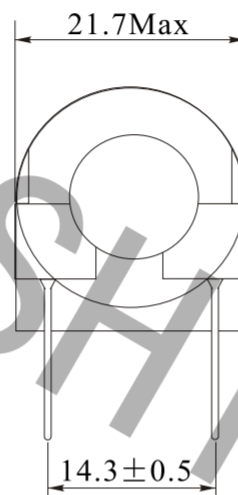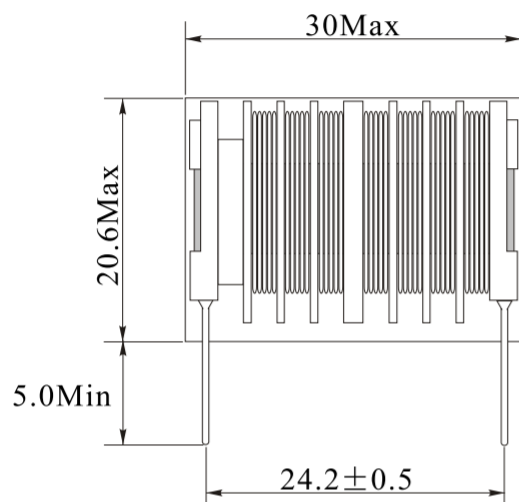

2. ELECTRICAL SCHEMATIC

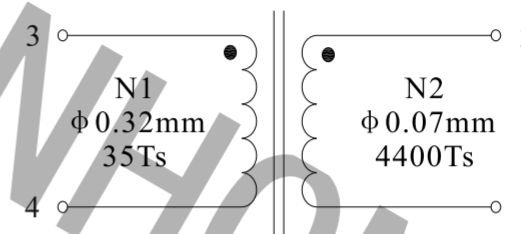

3. ELECTRICAL SPECIFICATIONS

Turns ratio: 35:4400

Inductance: N1: 105uH±20%@1.0KHz,1V

N2: 580mH±20%@1.0KHz,1V

Note:

- 1.Solderability: leads shall meet MIL-STD-202, Method 208D for solderability.
- 2.Flammability: UL94V-0
- 3.ASTM oxygen index: >28%

Test Instrument: WK3260B+3261A

NOTES:

Temp 20°C 48%RH
RoHS Compliant

NAME:	High voltage transformer		
CUSTOMER P/N:		DATE:	2022-03-28
SHINHOM P/N:	HT0828-35-4400	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	





SHINHOM
SHAANXISHINHOM ENTERPRISE CO LTD


The Document property belong to SHINHOM & is not allowed to be duplicated without authorization

Rev.	Description	Date
A0	New release	2016.11.03

1. PHYSICAL CHARACTERISTICS (mm)

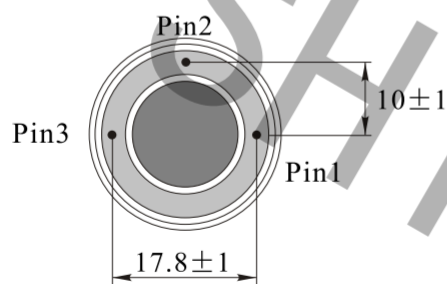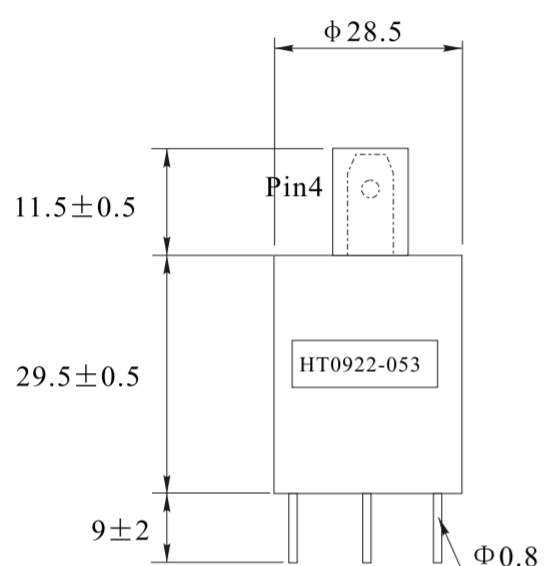

2. ELECTRICAL SCHEMATIC

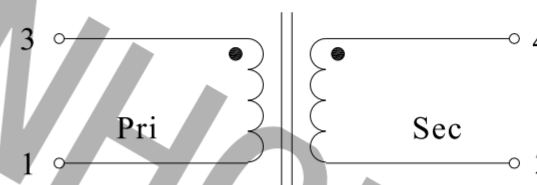

3. ELECTRICAL SPECIFICATIONS

Turns ratio:	Pri:Sec=1:53
Pri DCR:	100mΩ Max
Sec DCR:	300Ω Max
Pri inductance:	17.5uH ±5uH@1.0Hz,1V
Sec inductance:	50mH ±10mH@1.0Hz,1V

4. MATERIAL LIST

No	MATERIAL	MATERIAL SPEC	PROVIDER	UL.NO
1	Epoxy	102GF30UVW Transparent	Beijing hanlun industrial plastics Co.,Ltd	E243880
2	WIRE	MW79#	Xu zhou shengbao industryCo.,Ltd	E194766
3	Bobbin	PBT4130 White	Yun Cheng plsadtics Co., Ltd	F48285CM
4	Shell	ABS PA-765A Black	Chi Mei Corporation	E56070

NAME:	High voltage ignition coil		
CUSTOMER P/N:		DATE:	2016-11-03
SHINHOM P/N:	HT0922-053	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	




SHINHOM
SHAANXISHINHOM ENTERPRISE CO LTD


The Document property belong
to SHINHOM & is not allowed to be
duplicated without authorization

Rev.	Description	Date
A0	New release	2021.12.16

1. PHYSICAL CHARACTERISTICS (mm)

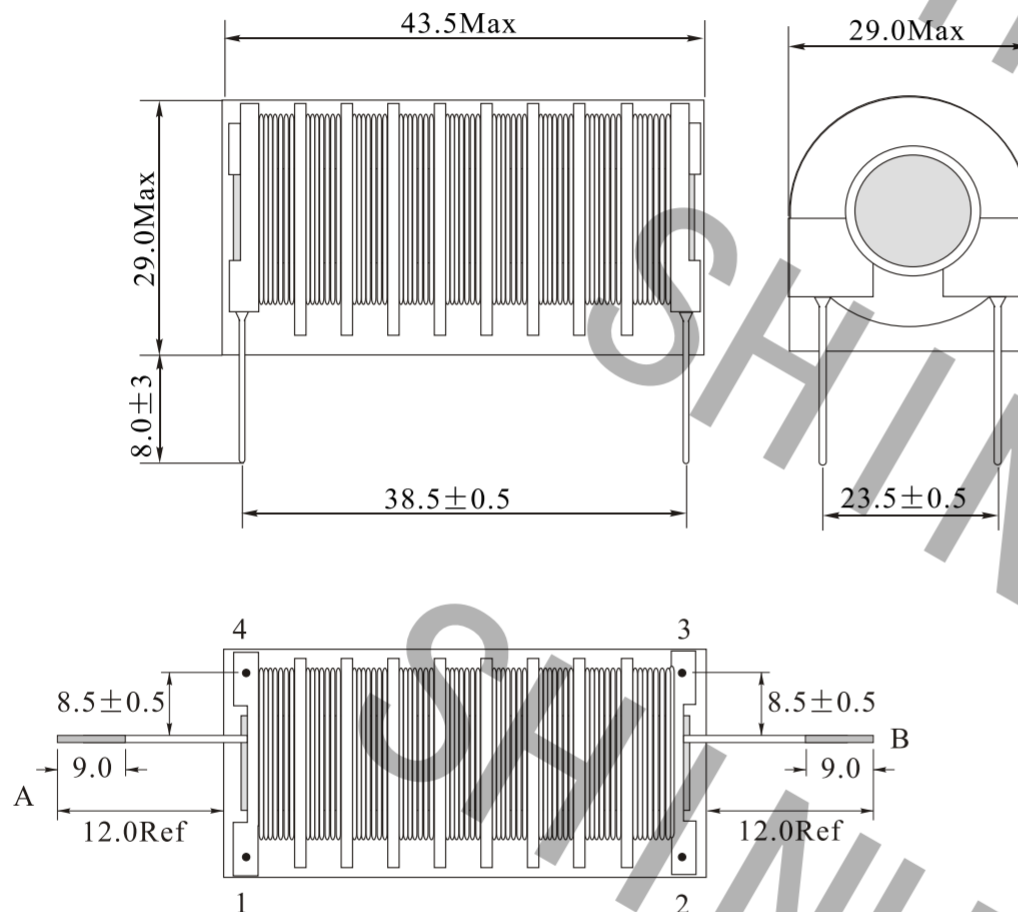

2. ELECTRONICAL SCHEMATIC

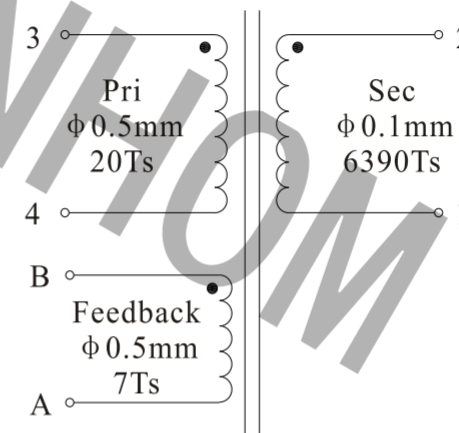

3. ELECTRONICAL SPECIFICATIONS

Inductance: Pin3-4: $20.0\mu\text{H} \pm 20\%$ @ 1KHz, 0.1V

Pin2-1: $1.4\text{H} \pm 20\%$ @ 1KHz, 0.1V

Turns ratio: Sec: Pri = 6390:20

DCR: Pin3-4: $72\text{m}\Omega \pm 10\%$

Pin2-1: $815\Omega \pm 7\%$

Operating temperature: -25°C to $+105^\circ\text{C}$

NOTES:

Temp 20°C 48%RH
RoHS Compliant

NEME:	Ignition transformer		
CUSTOMER P/N:		DATE:	2021-12-16
SHINHOM P/N:	HT1040-642-3	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	




SHINHOM
SHAANXISHINHOM ENTERPRISE CO LTD

The Document property belong
to SHINHOM & is not allowed to be
duplicated without authorization


Rev.	Description	Date
A0	New release	2021.11.09

1. PHYSICAL CHARACTERISTICS (mm)

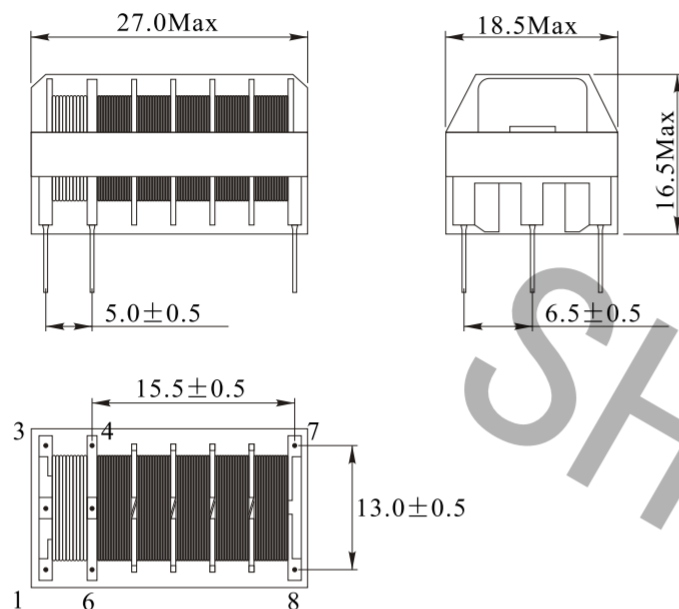

Bottom view

2. ELECTRICAL SCHEMATIC

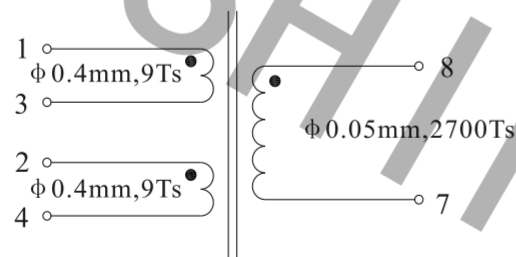

3. ELECTRICAL SPECIFICATIONS

Inductance(1-3)=(2-4): 7~16uH@1KHz,0.1V

DCR(1-3)=(2-4): 37mΩ ±20%

Inductance(8-7): 1.0H ±20%@1KHz,0.1V

DCR(8-7): 650Ω ±20%

4. MATERIALS

No.	Name	Ratings	Manufacturer name
1	magnetic core	EEL16 PC40	SONGNA
2	copper wire	φ 0.05mm 2UEW φ 0.4mm 2UEW	JINGWEI
3	adhesive tape	130℃	WENLIAN
4	skeleton	150℃	ZHISHENG
5	epoxy	TA228	PINTE
6	curing agent	B2006	PINTE
7	tin	Green tin	HONGXINGWEI

NAME:	High voltage transformer		
CUSTOMER P/N:		DATE:	2021-11-09
SHINHOM P/N:	HT16L-2700-18	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	




SHINHOM
SHAANXISHINHOM ENTERPRISE CO LTD


The Document property belong to SHINHOM & is not allowed to be duplicated without authorization

Rev.	Description	Date
A0	New release	2022.06.28


1. PHYSICAL CHARACTERISTICS (mm)

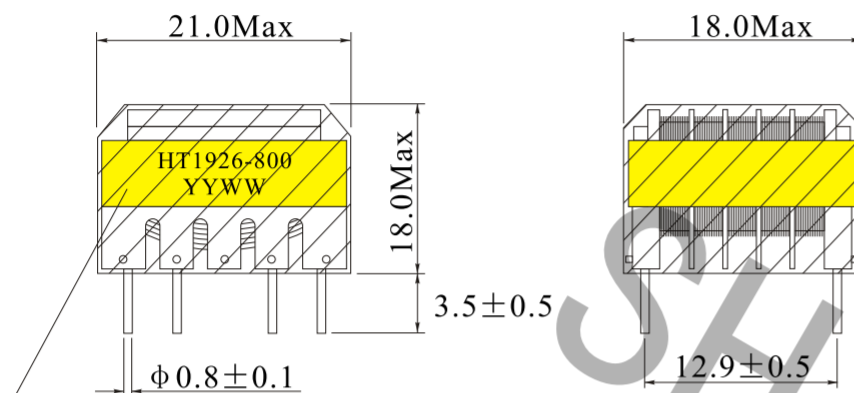


Mark label before encapsulation

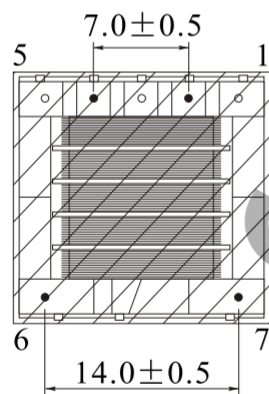

Note: Secondary correct output mode

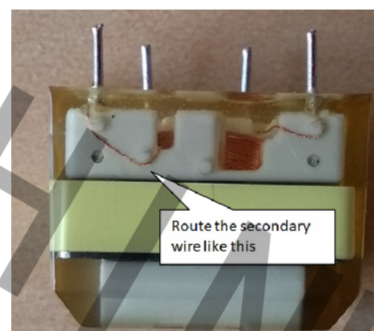

2. ELECTRONICAL SCHEMATIC

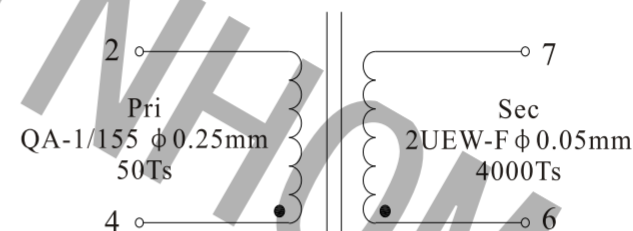

3. ELECTRONICAL SPECIFICATIONS

Turns ratio: Pri : Sec=1:80

Inductance(2-4): 190uH ± 20%@10KHz,0.1V

Inductance(7-6): 960mH ± 20%@10KHz,0.1V

Operating temperature: -25°C to 85°C


NOTES:

Temp 20°C 48%RH
RoHS Compliant

NEME:	High voltage transformers		
CUSTOMER P/N:		DATE:	2022-06-28
SHINHOM P/N:	HT1926-800	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	

Rev.	Description	Date
A0	New release	2018.07.11

1. PHYSICAL CHARACTERISTICS (mm)

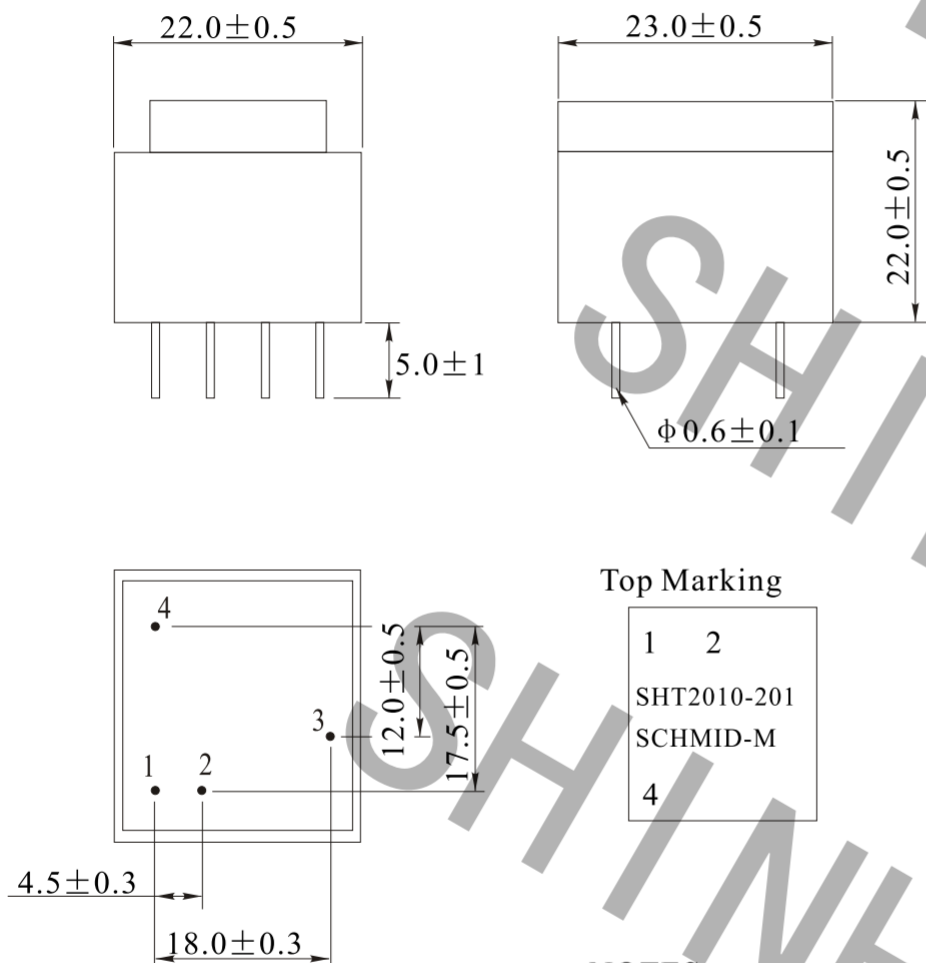


Top Marking

1	2
SHT2010-201	
SCHMID-M	
4	

NOTES:

Temp 20°C 48%RH
RoHS Compliant

2. ELECTRONICAL SCHEMATIC

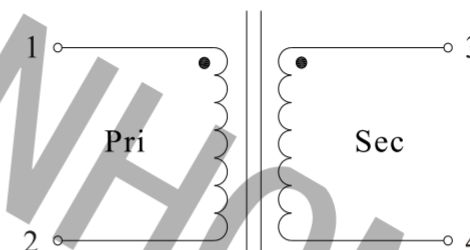

3. ELECTRONICAL SPECIFICATIONS

Turns ratio:	1:200
Pri voltage:	10~200V
Sec voltage:	22kV Min
Pri DCR:	26mΩ ±15%
Sec DCR:	520Ω ±15%
Pri inductance:	6uH ±15% @100Hz, 0.3V
Sec inductance:	240mH ±15% @100Hz, 0.3V
Output power:	1W
Noload work time:	30S
Operating temperature:	0°C to +80°C

NAME:	High voltage transformers		
CUSTOMER P/N:		DATE:	2018-07-11
SHINHOM P/N:	HT2010-201	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	







SHINHOM
SHAANXISHINHOM ENTERPRISE CO LTD


The Document property belong to SHINHOM & is not allowed to be duplicated without authorization

Rev.	Description	Date
A0	New release	2020.04.28

1. PHYSICAL CHARACTERISTICS (mm)

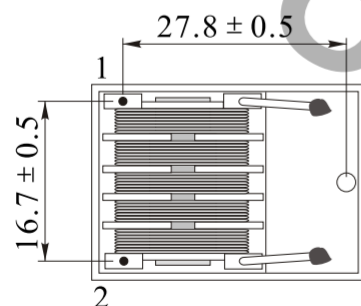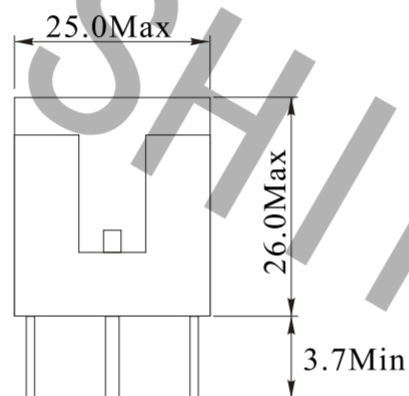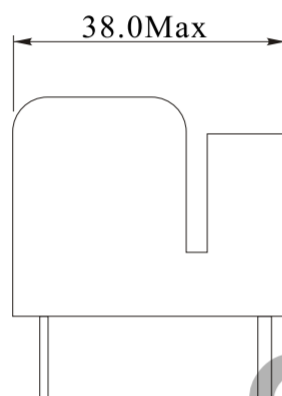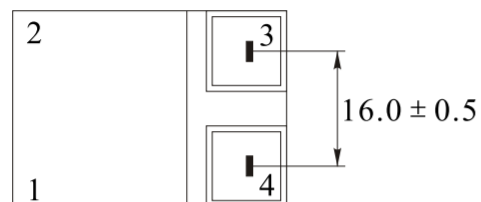

2. ELECTRICAL SCHEMATIC

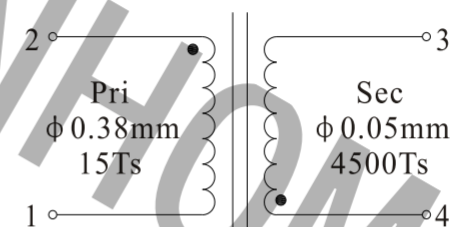

3. ELECTRICAL SPECIFICATIONS

Inductance: Pin2-1: $10\mu\text{H} \pm 20\%$ @1KHz, 0.3V

Pin4-3: $500\text{mH} \pm 20\%$ @1KHz, 0.3V

Turns ratio: Sec: Pri = 300 Ref

DCR: Pin2-1: $80\text{m}\Omega \pm 20\%$

Pin4-3: $1600\Omega \pm 20\%$

NOTES:

Temp 20°C 48%RH
RoHS Compliant

NEME:	Ignition transformer		
CUSTOMER P/N:	2179	DATE:	2020-04-28
SHINHOM P/N:	HT2528V-241-2	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	




SHINHOM
SHAANXISHINHOM ENTERPRISE CO LTD


TEL: +86-029-87851838
FAX: +86-029-87851840
ZIP: 710054
Http://www.shinhom.com
E-mail: shinhom@globalsources.com
sales@shinhom.com.cn
NO. 8, Yanta Northern Road, Xi'an Shaanxi Pro. China

Rev.	Description	Date
A0	New release	2022.05.17

1. PHYSICAL CHARACTERISTICS (mm)

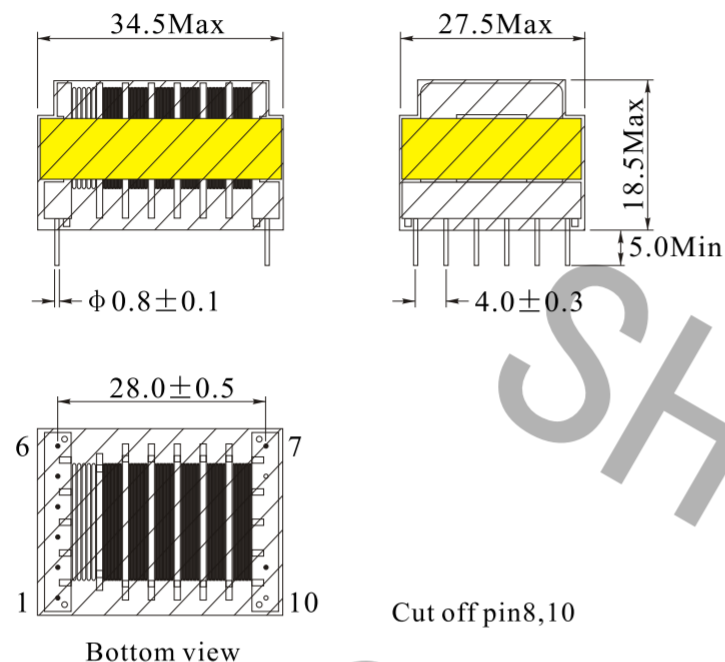

2. ELECTRICAL SCHEMATIC

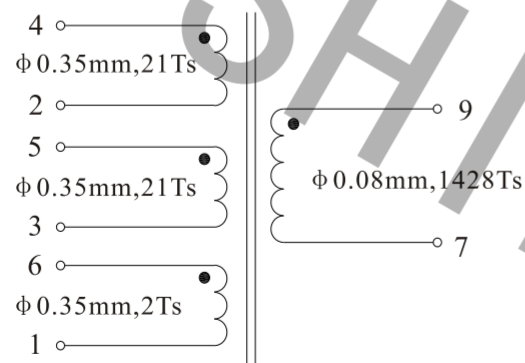

3. ELECTRICAL SPECIFICATIONS

Inductance(4-2): 99uH±20%@1KHz,0.1V

DCR(4-2): 0.15Ω±20%

Inductance(9-7): 365mH±17%@1KHz,0.1V

DCR(9-7): 191Ω±20%

Test Instrument:

L: HP4284A

RDC: HM2540

Note:

1. Solderability: leads shall meet MIL-STD-202, Method 208D for solderability.

2. Flammability: UL94V-0

3. ASTM oxygen index: >28%

NAME:	High voltage transformer		
CUSTOMER P/N:	EEH2513	DATE:	2022-05-17
SHINHOM P/N:	HT25L-1482-44	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	




SHINHOM
SHAANXISHINHOM ENTERPRISE CO LTD

The Document property belong to SHINHOM & is not allowed to be duplicated without authorization


Rev.	Description	Date
A0	New release	2017.03.20

1. PHYSICAL CHARACTERISTICS (mm)

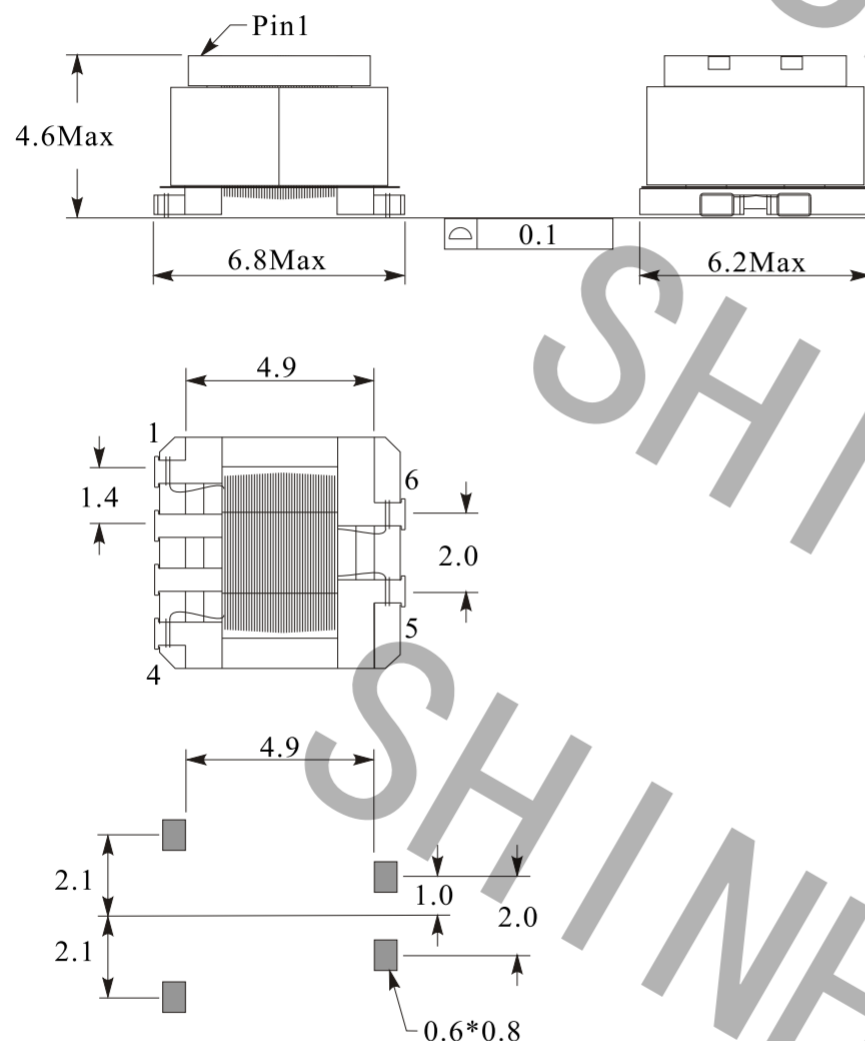

Recommended LAN Pattern

2. ELECTRONICAL SCHEMATIC

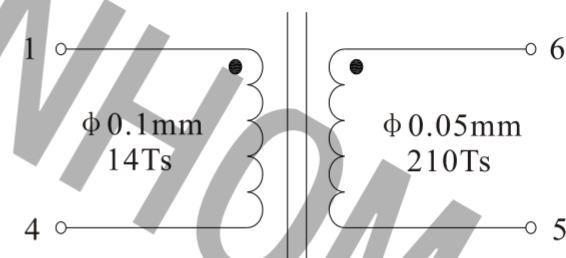

3. ELECTRONICAL SPECIFICATIONS

Turns ratio: (1-4):(6-5)=1:15
 L(1-4): $15\mu\text{H} \pm 10\%$ @1.0KHz, 1V
 Lk: $0.3\mu\text{H Max}$ @100KHz, 0.1V
 DCR(1-4): 1.0Ω Max
 DCR(6-5): 25Ω Max
 Ipk: 1.2A
 Inductance(Ipk): $13.5\mu\text{H Min}$ @1.0KHz, 1V
 Ambient temperature: -40°C to $+125^{\circ}\text{C}$
 Operating temperature: -40°C to $+125^{\circ}\text{C}$




NAME:	High voltage transformers		
CUSTOMER P/N:	CJ5143-AL	DATE:	2017-03-20
SHINHOM P/N:	HT5143	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	




SHINHOM
SHAANXISHINHOM ENTERPRISE CO LTD

The Document property belong to SHINHOM & is not allowed to be duplicated without authorization

MECHANICAL DIMENSION:(UNIT:mm)

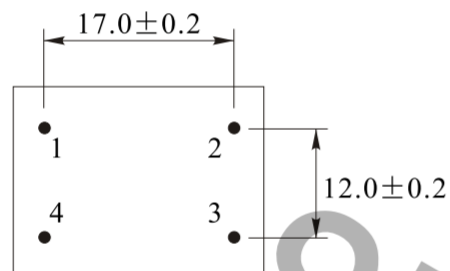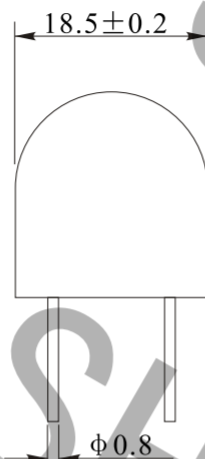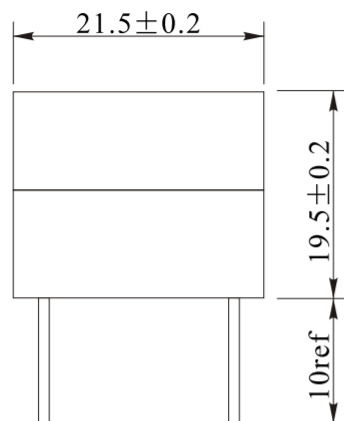

SCHEMATIC:

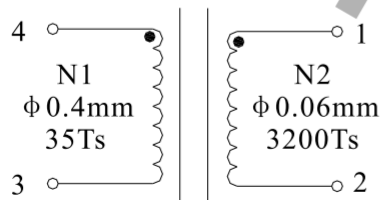

WINDING:

WDG	TERMINAL	WIRE SIZE	TURNS	REMARKS
N1	4-3	φ 0.4mm	35TS	
N2	1-2	φ 0.06mm	3200TS	

ELECTRICAL CHARACTER:

NO.	ITEM	MEASURED POINT	TECHNICAL DATA	TEST CONDITION & INSTRUMENT
1	Inductance	4-3	31.5uH±10%	1KHz 0.25V
		1-2	250mH±10%	
2	DCR	4-3	115mΩ ±10%	HM2540
		1-2	700Ω ±10%	

MATERIAL LIST:

NO.	ITEM	MATERIALS	RATING	FILE NO	SUPPLIERS
1	CORE	R6.5X21	---	---	SHANDONG ZHAOYUAN GAOXIANGDI ANZIYOUXIAN GON GSI CO.,LTD
2	WIRE	EIW (POLYESTERIMIDE)	180℃	E85640	TAH ELECTRIC WIRE&CABLE CO.,LTD
3	BOBBIN	PBT	130℃	E130155	NAN YA PLASTICS CORP
4	EPOXY	HASUNCAST 3010	110℃	E86165	SHENZHEN SHI HUASHENG TONGCHUAN GKEJIY OUXIANGONGSI CO.,LTD


NAME:	Ignition Transformers		
CUSTOMER P/N:		DATE:	2011-06-02
SHINHOM P/N:	HT6521	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	




SHINHOM
SHAANXISHINHOM ENTERPRISE CO LTD

The Document property belong
to SHINHOM & is not allowed to be
duplicated without authorization

1. PHYSICAL CHARACTERISTICS(mm)

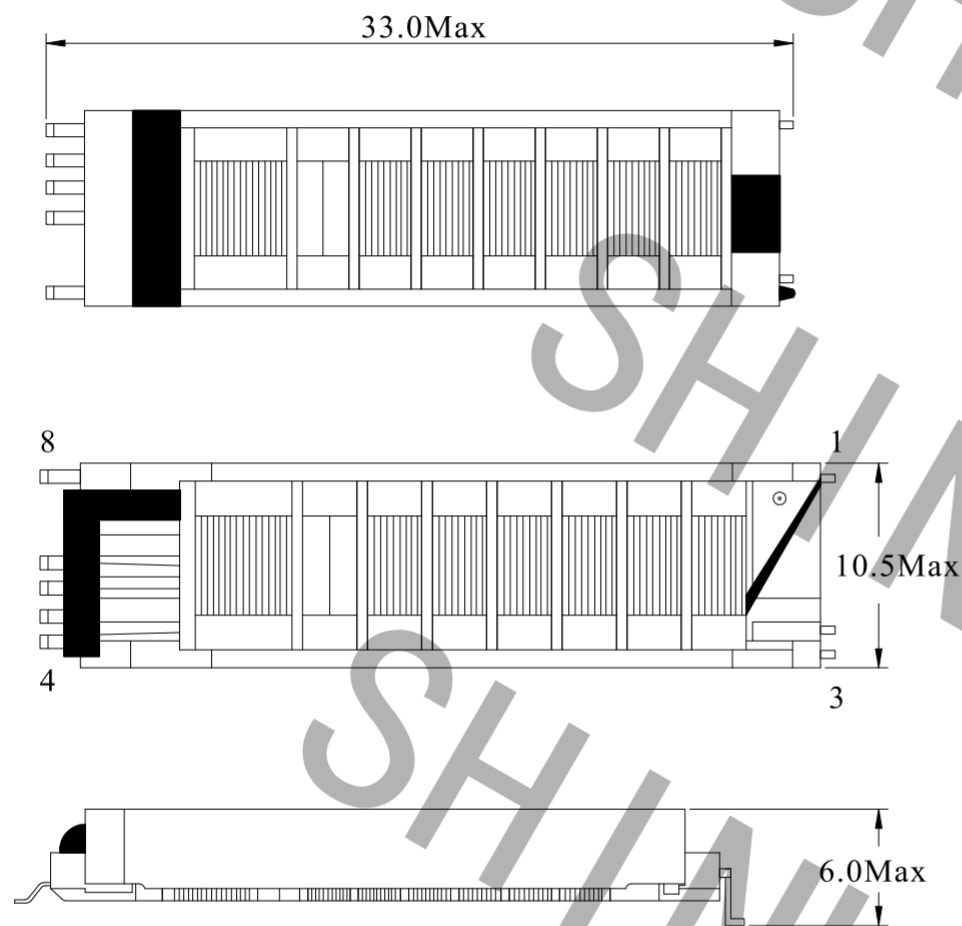

2. ELECTRONICAL SCHEMATIC

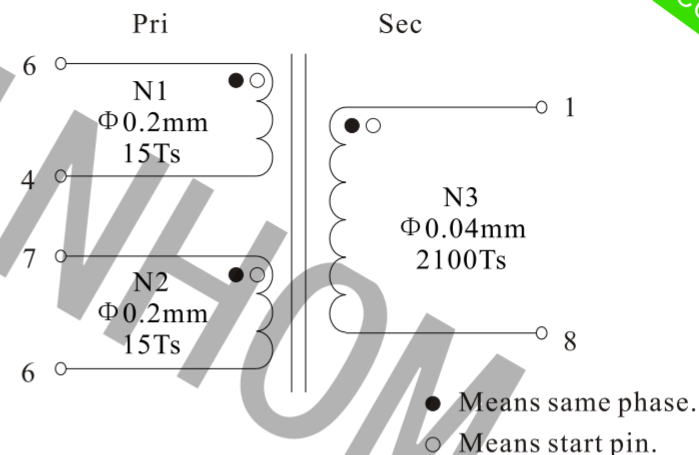

3. ELECTRONICAL SPECIFICATIONS

Inductance: Pin1-8: 0.68H Min@1KHz,1V
 Pin6-4: 32.8uH Min@1KHz,1V
 Pin7-6: 32.8uH Min@1KHz,1V
 Lk: Pin1-8: 0.23mH $\pm$ 15%@40KHz,1V
 Pin6-4: 11uH $\pm$ 15%@40KHz,1V
 Pin7-6: 11uH $\pm$ 15%@40KHz,1V
 DCR: Pin1-8: 0.67K Ω Max
 Pin6-4: 0.2 Ω Max
 Pin7-6: 0.19 Ω Max
 Hi-Pot: Pri-Sec: 3.0KVac,5mA,2S
 Pri-Core: 1.0KVac,5mA,2S
 Sec-Core: 3.0KVac,5mA,2S

NOTES:

Temp 25°C 48%RH
 RoHS Compliant

NAME:	Transformer		
CUSTOMER P/N:	FT-BIT0908A	DATE:	2012-05-29
SHINHOM P/N:	HTUI98-032	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	



SHINHOM
 SHAANXISHINHOM ENTERPRISE CO LTD

The Document property belong to SHINHOM & is not allowed to be duplicated without authorization



HTS Series High-voltage ignition Transformer


1. Outline:

HTS Series High-voltage ignition transformers are widely used in many installation's ignition such as small burners, fuel & gas burners, integrated burners, industrial combustion equipment etc.

2. Technical parameters:

	HTS-7	HTS□-8B	HTS□-10A
Input	Voltage: 220V/50Hz	Voltage: 220V/50Hz	Voltage: 220V/50Hz
	Current: ≤0.7A	Current: ≤1.1A	Current: ≤1.2A
Output	Voltage: ≥1x7KV or ≥2x4KV	Voltage: ≥1x8KV	Voltage: ≥2x5KV
	Current: ≥15mA	Current: ≥20mA	Current: ≥20mA
Outline dimension	92X70X57mm	110X86X68mm	110X86X68mm
Ignition distance	3~4mm	3~5mm	3~6mm
Ignition efficiency within 3 minutes	Interval time 20%	Interval time 33%	Interval time 33%
	Continuous -----	Continuous 100%	Continuous 100%
output type	Swingle polar、Bipolar	Swingle polar	Bipolar
output form	Lead wire	Lead wire/Plug-in unit	Lead wire/Plug-in unit
USE	Ignition of smaller burners ,fuel gas burners,integrated burners,industrial combustion equipment etc.		

3. Order description:


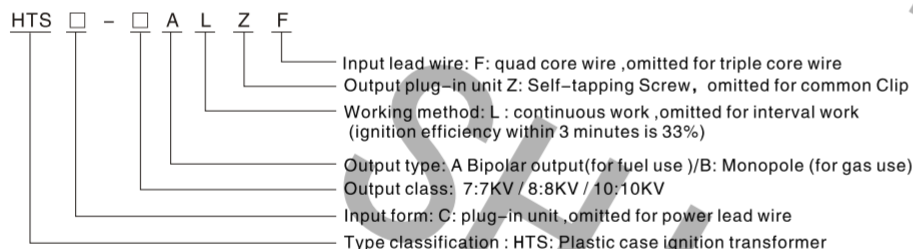


4. Product type table for chosen





Output voltage	Output type		Work type		Input form		Output form		Input lead wire	
	Swingle	Bipolar	Continuous	Interval time	Plug-in unit	Lead wire	Self-tapping	omitted for common	triple core wire	quad core wire
7KV	✓	✓	x	✓	x	✓	✓	✓	✓	✓
8KV	✓	x	✓	✓	✓	✓	✓	✓	✓	✓
10KV	x	✓	✓	✓	✓	✓	x	✓	✓	x

✓: Optional

X: Not optional



Note: The double color wire must be well grounded when you use the transformers



Note: The double color wire must be well grounded when you use the transformers

Technical parameters:

HTS-8B

Input: 220V, ≤1.1A, 50Hz
Output: ≥1x8KV, 20mA
Outline dimension: 110X86X68mm
Ignition distance: 3~5mm
Ignition efficiency within 3 minutes: 33%

Input form: Plug-in unit
Lead wire
Output form: Self-tapping
Omitted for common

HTS-10A

Input: 220V, ≤1.2A, 50Hz
Output: ≥2x5KV, 20mA
Outline dimension: 110X86X68mm
Ignition distance: 3~6mm
Ignition efficiency within 3 minutes: 33%

Output form: Plug-in unit
Lead wire

HTS-10AL

Input: 220V, ≤0.6A, 50Hz
Output: ≥2x4KV, 15mA
Outline dimension: 110X86X68mm
Ignition distance: 3~6mm
Ignition efficiency within 3 minutes: 100%

Output form: Plug-in unit
Lead wire

HT Series High-voltage ignition Transformer


1. Outline:

HT Series high voltage ignition transformers are widely used in many kinds of installation's ignition such as kitchen equipment burners, small burners, fuel & gas burners, tunnel kiln burners, integrated burners, radiant tube burners, high velocity burners, industrial furnace etc.

2. Technical parameters:

	HT-6	HT-8	HT-10	HT-14
Input	Voltage: 220V/50Hz	Voltage: 220V/50Hz	Voltage: 220V/50Hz	Voltage: 220V/50Hz
	Current: $\leq 0.7A$	Current: $\leq 1.1A$	Current: $\leq 1.2A$	Current: $\leq 1.8A$
Output	Voltage: $\geq 1x6KV$	Voltage: $\geq 1x8KV$	Voltage: $\geq 2x5KV$	Voltage: $\geq 2x7KV$
	Current: $\geq 15mA$	Current: $\geq 20mA$	Current: $\geq 20mA$	Current: $\geq 25mA$
Outline dimension	82X69X67mm	100X92X73mm	100X92X73mm	100X92X73mm
Ignition distance	2~3mm	3~5mm	3~5mm	4~6mm
Ignition efficiency within 3 minutes	Interval time 33%	Interval time 33%	Interval time 33%	Interval time 25%
	Continuous -----	Continuous 100%	Continuous 100%	Continuous -----
output type	Swingle polar, Bipolar	Swingle polar, Bipolar	Bipolar	Bipolar
output form	Lead wire/Plug-in unit	Lead wire/Plug-in unit	Lead wire/Plug-in unit	Lead wire/Plug-in unit
USE	many kinds of installation's ignition such as kitchen equipment burners, small burners, fuel & gas burners, tunnel kiln burners	Ignition of smaller burners, fuel gas burners, integrated burners, industrial combustion equipment etc.		


3. Order description:

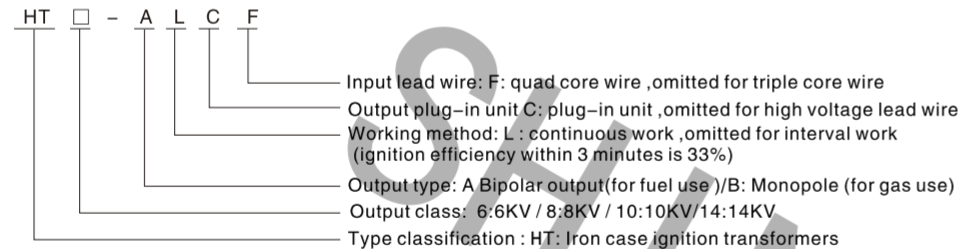

4. Product type table for chosen

Output voltage	Output type		Work type		Output form		Input lead wire	
	Swingle	Bipolar	Continuous	Interval time	Plug-in unit	Lead wire	triple core wire	quad core wire
6KV	✓	✓	x	✓	✓	✓	✓	✓
8KV	✓	x	✓	✓	✓	✓	✓	✓
10KV	x	✓	✓	✓	✓	✓	✓	✓
14KV	x	✓	x	✓	✓	✓	✓	x

✓: Optional x: Not optional

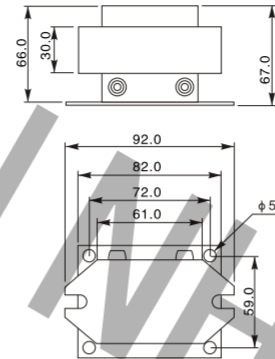


Note: The double color wire must be well grounded when you use the transformers

Technical parameters:

HT-6A□□
 Input: 220V, $\leq 0.7A$, 50Hz
 Output: $\geq 6KV$, 15mA
 Outline dimension: 82X69X67mm
 Ignition distance: 2~3mm
 Ignition efficiency within 3 minutes: 33%
 Output form: Plug-in unit
 Lead wire

HT-6B□□
 Input: 220V, $\leq 0.7A$, 50Hz
 Output: $\geq 6KV$, 15mA
 Outline dimension: 82X69X67mm
 Ignition distance: 2~3mm
 Ignition efficiency within 3 minutes: 33%
 Output form: Plug-in unit
 Lead wire

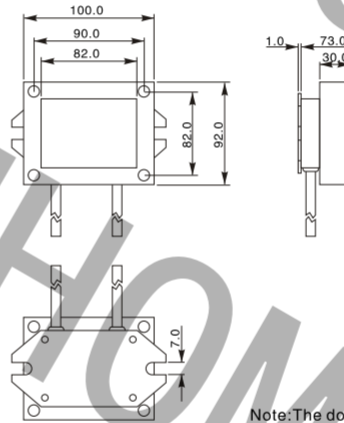


Note: The double color wire must be well grounded when you use the transformers

Technical parameters:

HT-8A□□□
 Input: 220V, $\leq 1.1A$, 50Hz
 Output: $\geq 1x8KV$, 20mA
 Outline dimension: 100X92X73mm
 Ignition distance: 3~5mm
 Ignition efficiency within 3 minutes: 33%/100%
 Input form: Plug-in unit
 Lead wire

HT-8B□□□
 Input: 220V, $\leq 1.1A$, 50Hz
 Output: $\geq 1x8KV$, 20mA
 Outline dimension: 100X92X73mm
 Ignition distance: 3~5mm
 Ignition efficiency within 3 minutes: 33%/100%
 Input form: Plug-in unit
 Lead wire

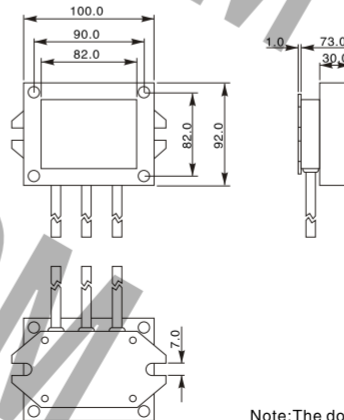

Note: The double color wire must be well grounded when you use the transformers

Technical parameters:

HT-10A□□□
 Input: 220V, $\leq 1.2A$, 50Hz
 Output: $\geq 2x5KV$, 20mA
 Outline dimension: 100X92X73mm
 Ignition distance: 3~5mm
 Ignition efficiency within 3 minutes: 33%/100%
 Input form: Plug-in unit
 Lead wire

HT-14A□
 Input: 220V, $\leq 1.8A$, 50Hz
 Output: $\geq 2x7KV$, 25mA
 Outline dimension: 100X92X73mm
 Ignition distance: 4~6mm
 Ignition efficiency within 3 minutes: 25%
 Input form: Plug-in unit
 Lead wire


Electronic series high voltage ignition transformers

1. Outline:

Electronic series high voltage ignition transformers are widely used in many installations such as Auto heater, ignition of kitchen equipment, fuel & gas heater etc.

2. Technical parameters:


	HT-12	□□-12	□□-24
Input	Voltage: 220V/50Hz	Voltage: 12V/DC	Voltage: 24V/DC
	Current: $\leq 0.2A$	Current: $\leq 3A$	Current: $\leq 1.5A$
Output	Voltage: $\geq 1x12KV$	Voltage: $\geq 1x14KV$	Voltage: $\geq 1x15KV$
	Current: $\geq 10mA$	Current: $\geq 10mA$	Current: $\geq 10mA$
Outline dimension	70X52X61mm	83X74X37mm	110X62X60mm 95X80X62mm 83X74X37mm
Ignition distance	3~5mm	3~5mm	3~6mm
Ignition efficiency within 3 minutes	Interval time 33%	Interval time 33%	Interval time 33%
	Continuous 100%	Continuous ---	Continuous 100%
output type	Swingle polar, Bipolar	Bipolar	Swingle polar, Bipolar
USE	Ignition of Auto heater, ignition of kitchen equipment, fuel & gas heater etc		

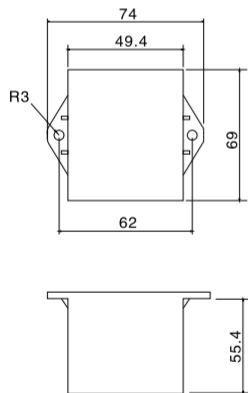

Technical parameters:

HT-12□□
 Input: 220V, $\leq 0.38A$, 50Hz
 Output: $\geq 12KV$
 Outline dimension: 70X52X61mm
 Ignition distance: 3~6mm
 Ignition efficiency within 3 minutes: HT-12□: 33%
 HT-12□L: 100%
 Output type: Monopole, Bipolar, XT-12A is bipolar output, two high-voltage wires outputted directly, suitable for fuel ignition;
 XT-12B is monopole, there is only one output high-voltage wire used for high-voltage output, low point of the high-voltage directly grounded through one double colour wire, suitable for gas ignition


Note: The double color wire must be well grounded when you use the transformers



Technical parameters:

HTZ-24V
 Input: 24VDC, continuous ignition 0.4~0.5A, interval ignition 0.8~1.2A
 Output: $\geq 15KV$
 Outline dimension: 95X80X62mm
 Ignition distance: 3~5mm
 Ignition efficiency within 3 minutes: 33%/100%


Note: The double color wire must be well grounded when you use the transformers



Technical parameters:

HNF-24
 Input: 24VDC, 0.8~1.2A
 Output: $\geq 15KV$
 Outline dimension: 116X62X60mm
 Ignition distance: 3~5mm
 Ignition efficiency within 3 minutes: 33%

Note: The double color wire must be well grounded when you use the transformers

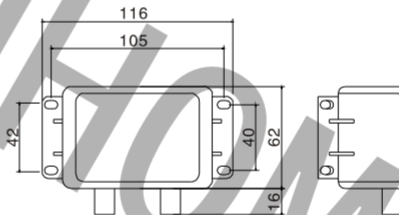


Technical parameters:

HTX-24V
 Input: 24VDC, $\leq 0.8A$
 Output: $\geq 14KV$
 Outline dimension: 83X74X37mm
 Ignition distance: 3~5mm
 Ignition efficiency within 3 minutes: 33%

Note: The double color wire must be well grounded when you use the transformers


1. PHYSICAL CHARACTERISTICS (mm)

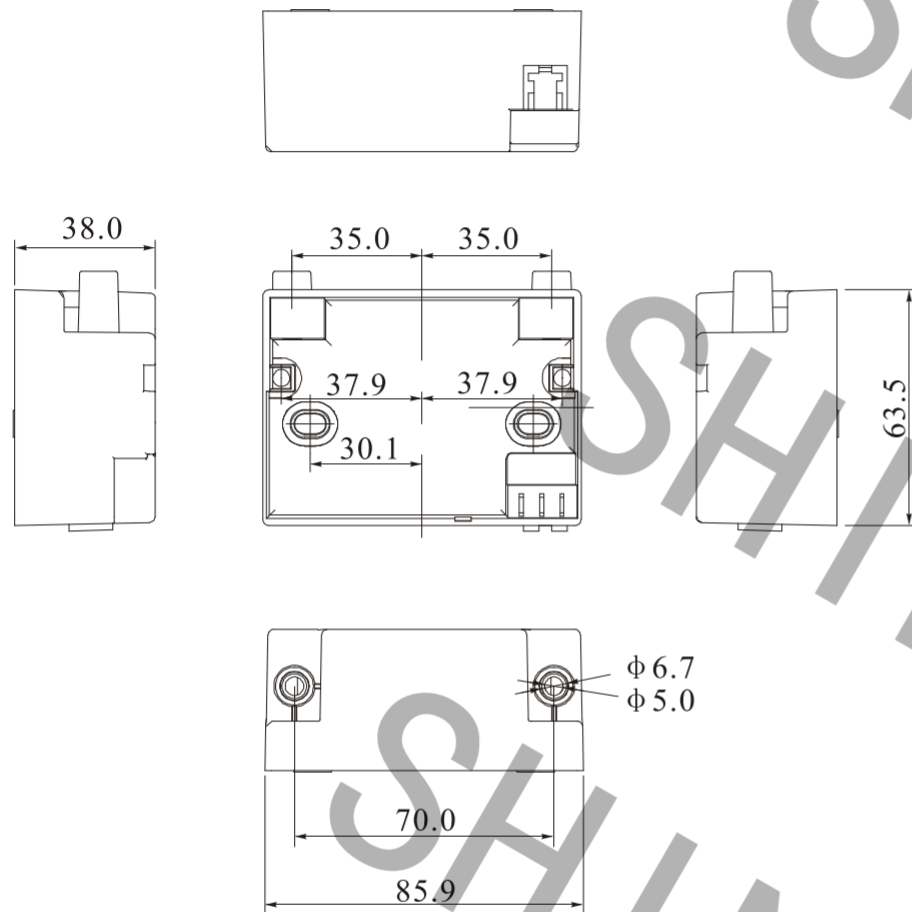

Marking

IGNITIONS TRANSFORMER	
Input: 220~240V, 0.25A, 50/60Hz	
Output: 12kV, 30mA, 33%ED in 3min	
Danger! High voltage	
Made in China	

2. ELECTRONICAL SCHEMATIC

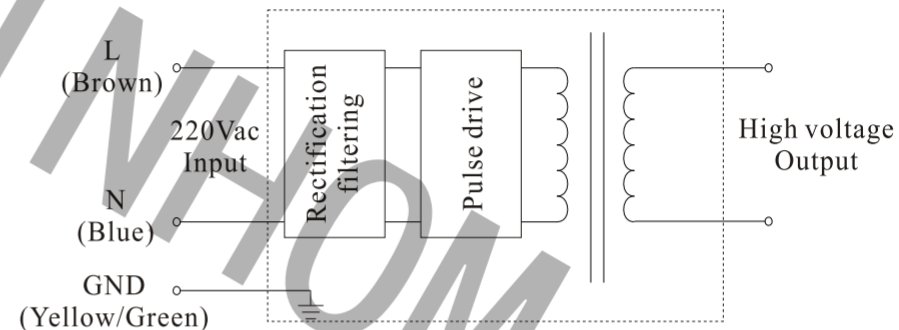

3. ELECTRONICAL SPECIFICATIONS

Input voltage:	220V $\pm$ 10%
Input current:	0.25A Max
Output voltage:	12KV(One output) 7.5kV(Two output)
Output current:	30mA Min
Ignition efficiency in three minutes:	33%(Interval work)
Ignition efficiency in three minutes:	100%(Continuous work)
Ignition distance:	3~5mm
Input lead wire:	ϕ 6(3x0.35mm ²), 460~520mm length
Operating temperature range:	-10°C to 55°C (No including temp. rise)
Storage temperature range:	-25°C to 70°C

NEME:	Ignition transformers		
CUSTOMER P/N:		DATE:	2023-12-19
SHINHOM P/N:	HT-15	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	




SHINHOM
SHAANXISHINHOM ENTERPRISE CO LTD

The Document property belong
to SHINHOM & is not allowed to be
duplicated without authorization


Rev.	Description	Date
A0	New release	2023.12.19

1. PHYSICAL CHARACTERISTICS (mm)


One output

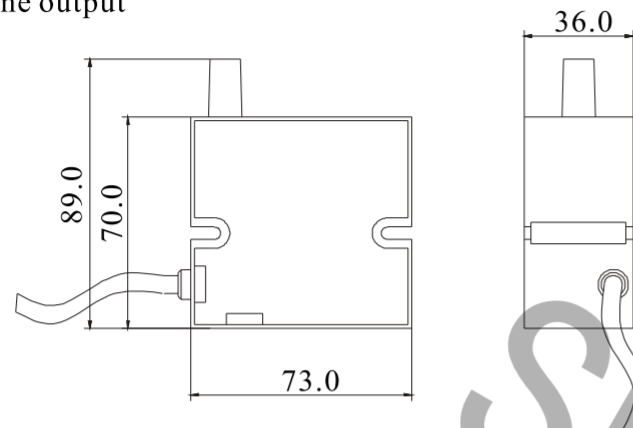


Two output

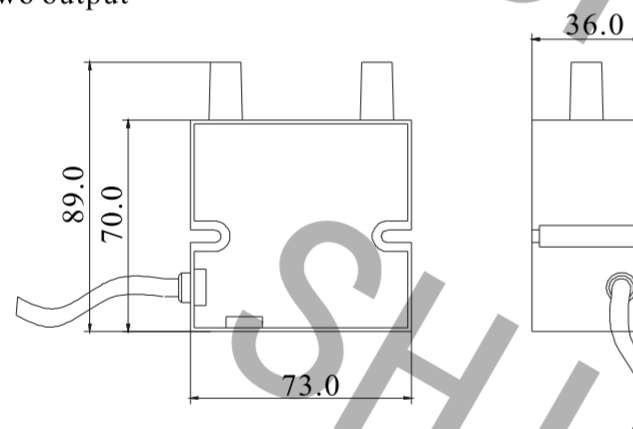

Marking

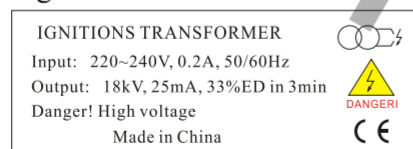

2. ELECTRONICAL SCHEMATIC

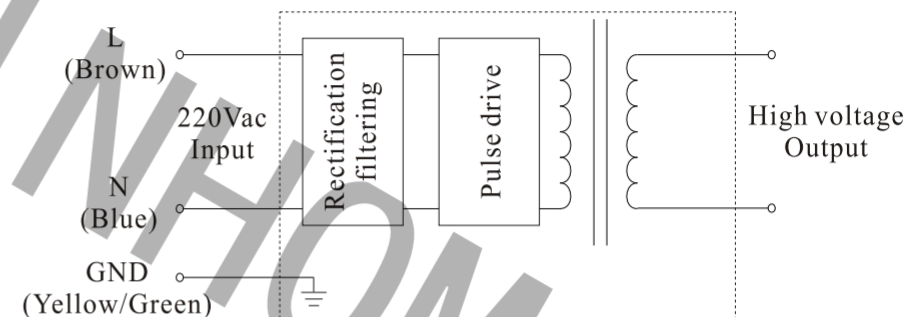

3. ELECTRONICAL SPECIFICATIONS

- Input voltage: 220V $\pm$ 10%
- Input current: 0.2A Max(Interval work)
0.1A Max(Continuous work)
- Output voltage: 18KV(One output)
12kV(Two output)
- Output current: 25mA Min
- Ignition efficiency in three minutes: 33%(Interval work)
100%(Continuous work)
- Ignition distance: 3~5mm
- Input lead wire: ϕ 6(3x0.35mm²), 460~520mm length
- Operating temperature range: -10°C to 55°C
(No including temp. rise)
- Storage temperature range: -25°C to 70°C

NEME:	Ignition transformers		
CUSTOMER P/N:		DATE:	2023-12-19
SHINHOM P/N:	HT-18	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	





SHINHOM
SHAANXISHINHOM ENTERPRISE CO LTD


The Document property belong
to SHINHOM & is not allowed to be
duplicated without authorization

Rev.	Description	Date
A0	New release	2017.12.19

1. PHYSICAL CHARACTERISTICS (mm)

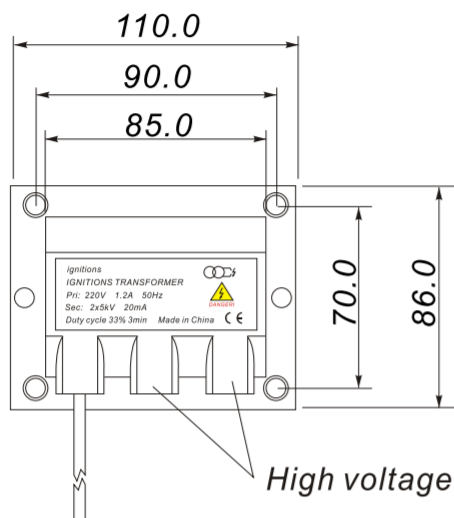

2. ELECTRONICAL SCHEMATIC

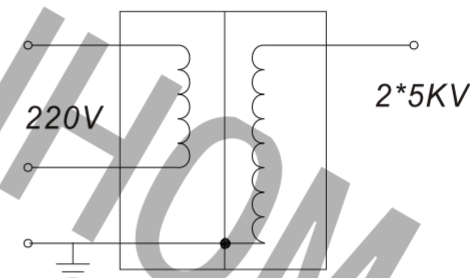

3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 220V/50Hz

Pri current: 1.2A

Apparent power: 264VA

Sec voltage at open circuit: $2*5KV \pm 10\%$

Sec current in short circuit: $20mA \pm 10\%$

Duty cycle: 33%, 3min

NOTES:

Temp 20°C 48%RH
RoHS Compliant

NEME:	Ignition transformer		
CUSTOMER P/N:		DATE:	2017-12-19
SHINHOM P/N:	HT110-10A	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	




SHINHOM

SHAANXI SHINHOM ENTERPRISE CO. LTD


TEL: +86-029-87851838
FAX: +86-029-87851840
ZIP: 710054
Http://www.shinhom.com
E-mail: shinhom@globalsources.com
sales@shinhom.com.cn
NO. 8, Yanta Northern Road, Xi'an Shaanxi Pro. China

Rev.	Description	Date
A0	New release	2017.12.19


1. PHYSICAL CHARACTERISTICS (mm)

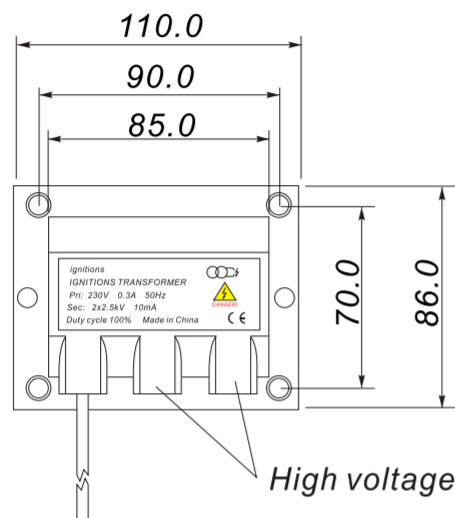

High voltage



2. ELECTRONICAL SCHEMATIC

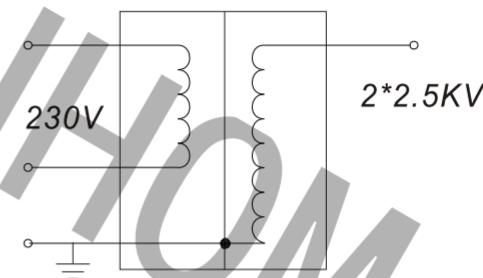

3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 230V/50Hz

Pri current: 0.3A

Apparent power: 69VA

Sec voltage at open circuit: $2*2.5KV \pm 10\%$

Sec current in short circuit: $10mA \pm 10\%$

Duty cycle: 100%

NOTES:

Temp 20°C 48%RH
RoHS Compliant

NEME:	Ignition transformer		
CUSTOMER P/N:		DATE:	2017-12-19
SHINHOM P/N:	HT110-10B	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	





SHINHOM

SHAANXI SHINHOM ENTERPRISE CO. LTD


TEL: +86-029-87851838
FAX: +86-029-87851840
ZIP: 710054
Http://www.shinhom.com
E-mail: shinhom@globalsources.com
sales@shinhom.com.cn
NO. 8, Yanta Northern Road, Xi'an Shaanxi Pro. China

Rev.	Description	Date
A0	New release	2018.01.19

1. PHYSICAL CHARACTERISTICS (mm)

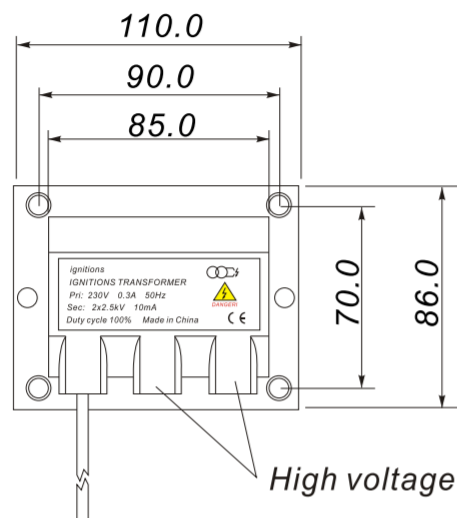

2. ELECTRONICAL SCHEMATIC

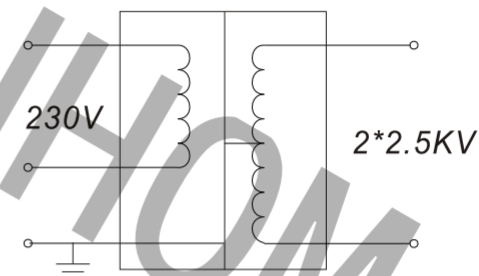

3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 230V/50Hz

Pri current: 0.3A

Apparent power: 69VA

Sec voltage at open circuit: $2*2.5KV \pm 10\%$

Sec current in short circuit: $10mA \pm 20\%$

Duty cycle: 100%

NOTES:

Temp 20°C 48%RH
RoHS Compliant

NEME:	Ignition transformer		
CUSTOMER P/N:		DATE:	2018-01-19
SHINHOM P/N:	HT110-10D	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	




SHINHOM

SHAANXI SHINHOM ENTERPRISE CO. LTD



TEL: +86-029-87851838
FAX: +86-029-87851840
ZIP: 710054
Http://www.shinhom.com
E-mail: shinhom@global-sources.com
sales@shinhom.com.cn
NO. 8, Yanta Northern Road, Xi'an Shaanxi Pro. China

Rev.	Description	Date
A0	New release	2017.12.19


1. PHYSICAL CHARACTERISTICS (mm)

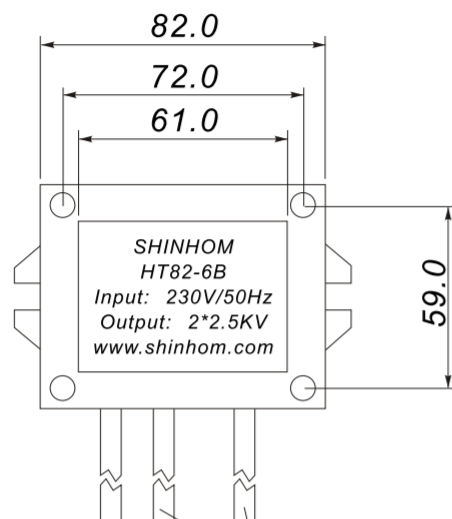

High voltage

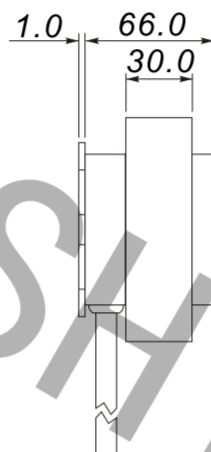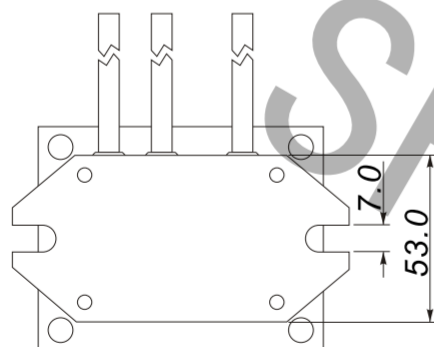

2. ELECTRONICAL SCHEMATIC

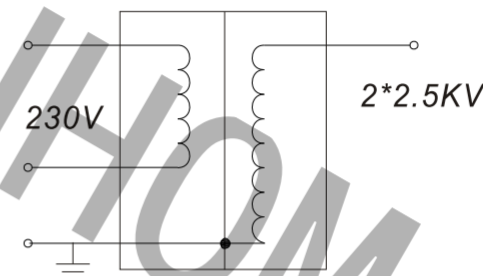

3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 230V/50Hz

Pri current: 0.3A

Apparent power: 69VA

Sec voltage at open circuit: $2*2.5KV \pm 10\%$

Sec peak voltage at open circuit: 3.54KV

Sec current in short circuit: $10mA \pm 10\%$

NOTES:

Temp 20°C 48%RH
RoHS Compliant

NEME:	Ignition transformer		
CUSTOMER P/N:		DATE:	2017-12-19
SHINHOM P/N:	HT82-6B	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	




SHINHOM

SHAANXI SHINHOM ENTERPRISE CO. LTD



TEL: +86-029-87851838
FAX: +86-029-87851840
ZIP: 710054
Http://www.shinhom.com
E-mail: shinhom@globalsources.com
sales@shinhom.com.cn
NO. 8, Yanta Northern Road, Xi'an Shaanxi Pro. China

Rev.	Description	Date
A0	New release	2018.01.19


1. PHYSICAL CHARACTERISTICS (mm)

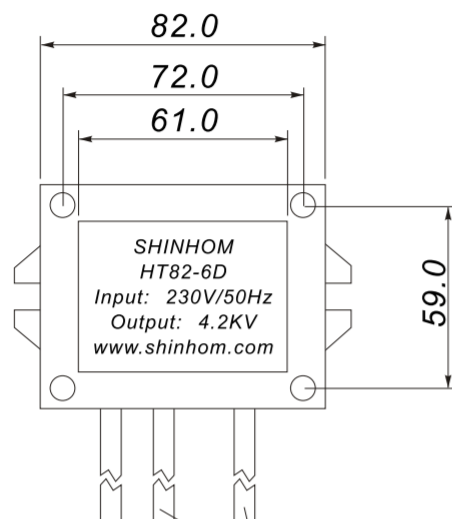

High voltage

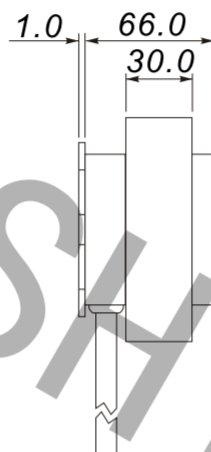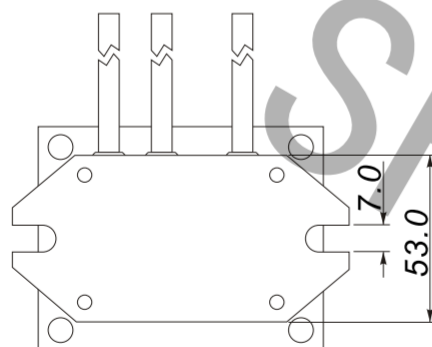

2. ELECTRONICAL SCHEMATIC

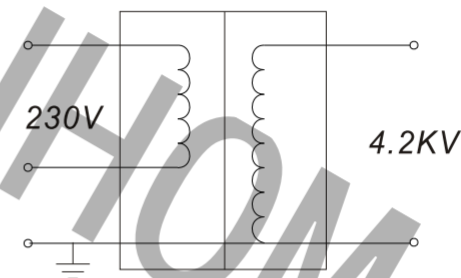

3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 230V/50Hz

Pri load current: 40mA Max

Pri no-load current: 180mA Max

Apparent power: 9.2VA

Sec voltage at open circuit: 4.2KV $\pm$ 10%

Sec current in short circuit: 6mA $\pm$ 20%

NOTES:

Temp 20°C 48%RH
RoHS Compliant

NEME:	Ignition transformer		
CUSTOMER P/N:		DATE:	2018-01-19
SHINHOM P/N:	HT82-6D	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	




SHINHOM

SHAANXI SHINHOM ENTERPRISE CO. LTD



TEL: +86-029-87851838
FAX: +86-029-87851840
ZIP: 710054
Http://www.shinhom.com
E-mail: shinhom@global-sources.com
sales@shinhom.com.cn
NO. 8, Yanta Northern Road, Xi'an Shaanxi Pro. China

Rev.	Description	Date
A0	New release	2018.01.19


1. PHYSICAL CHARACTERISTICS (mm)

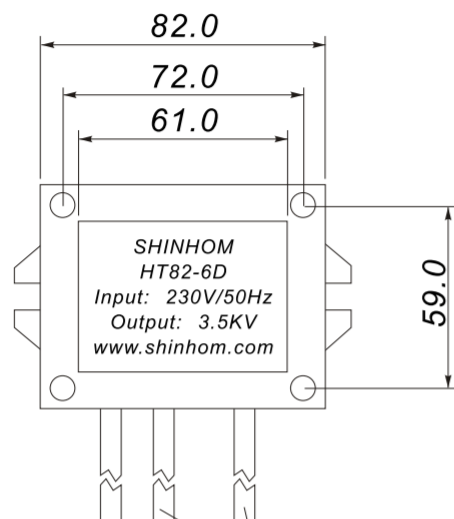

High voltage

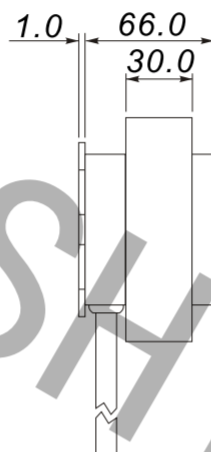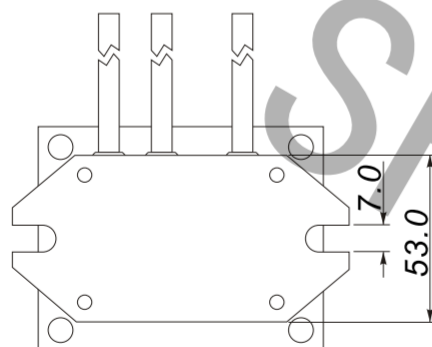

2. ELECTRONICAL SCHEMATIC

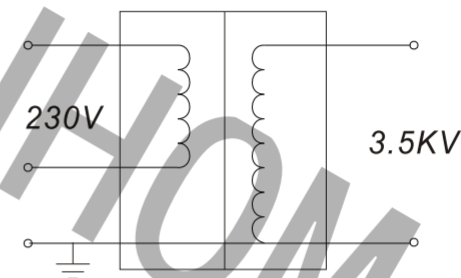

3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 230V/50Hz

Pri load current: 40mA Max

Pri no-load current: 150mA Max

Apparent power: 9.2VA

Sec voltage at open circuit: $3.5KV \pm 10\%$

Sec current in short circuit: $6mA \pm 20\%$

NOTES:

Temp 20°C 48%RH
RoHS Compliant

NEME:	Ignition transformer		
CUSTOMER P/N:		DATE:	2018-01-19
SHINHOM P/N:	HT82-6E	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	





SHINHOM

SHAANXI SHINHOM ENTERPRISE CO. LTD


TEL: +86-029-87851838
FAX: +86-029-87851840
ZIP: 710054
Http://www.shinhom.com
E-mail: shinhom@globalsources.com
sales@shinhom.com.cn
NO. 8, Yanta Northern Road, Xi'an Shaanxi Pro. China

Rev.	Description	Date
A0	New release	2017.12.19

1. PHYSICAL CHARACTERISTICS (mm)

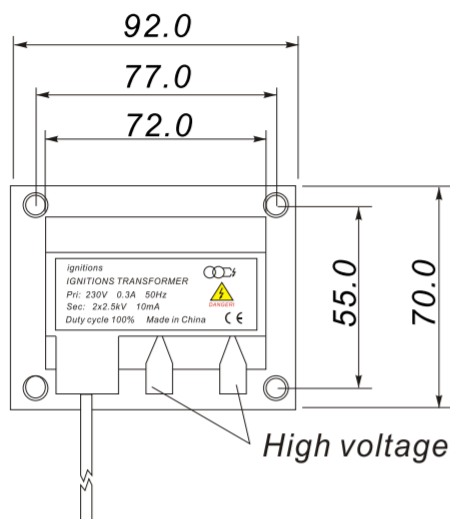

2. ELECTRONICAL SCHEMATIC

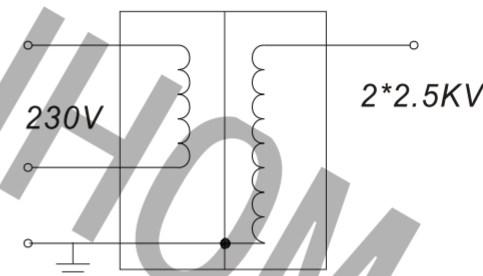

3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 230V/50Hz

Pri current: 0.3A

Apparent power: 69VA

Sec voltage at open circuit: $2*2.5KV \pm 10\%$

Sec peak voltage at open circuit: 3.54KV

Sec current in short circuit: $10mA \pm 10\%$

NOTES:

Temp 20°C 48%RH
RoHS Compliant

NEME:	Ignition transformer		
CUSTOMER P/N:		DATE:	2017-12-19
SHINHOM P/N:	HT92-7A	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	



SHINHOM

SHAANXI SHINHOM ENTERPRISE CO. LTD

TEL: +86-029-87851838
FAX: +86-029-87851840
ZIP: 710054
Http://www.shinhom.com
E-mail: shinhom@globalsources.com
sales@shinhom.com.cn
NO. 8, Yanta Northern Road, Xi'an Shaanxi Pro. China

